Double braced flooring

Juxtaposed floors

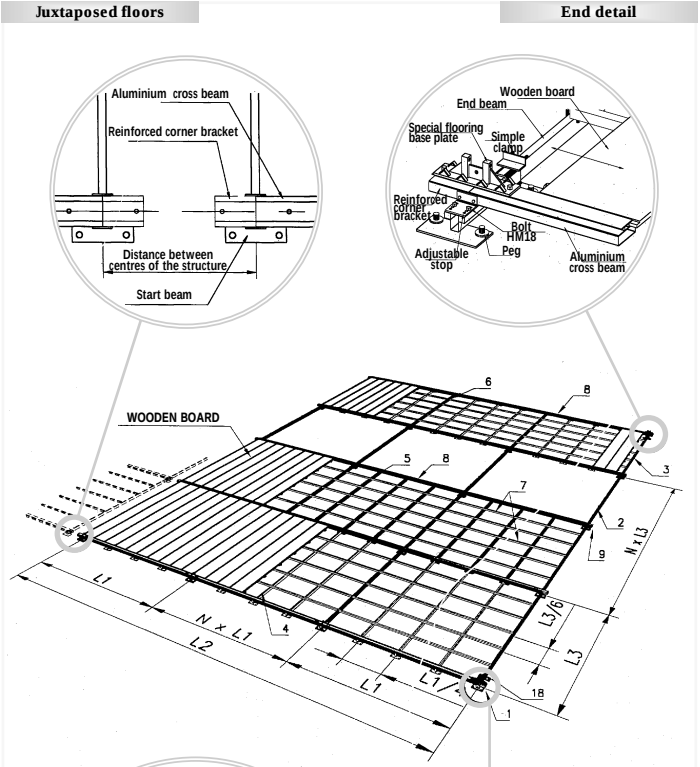

End detail

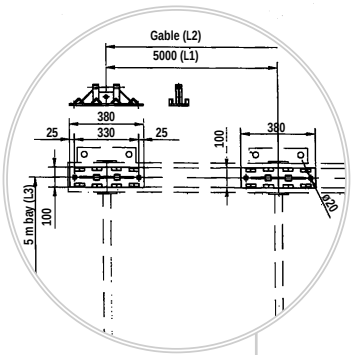



Base plates

Start details

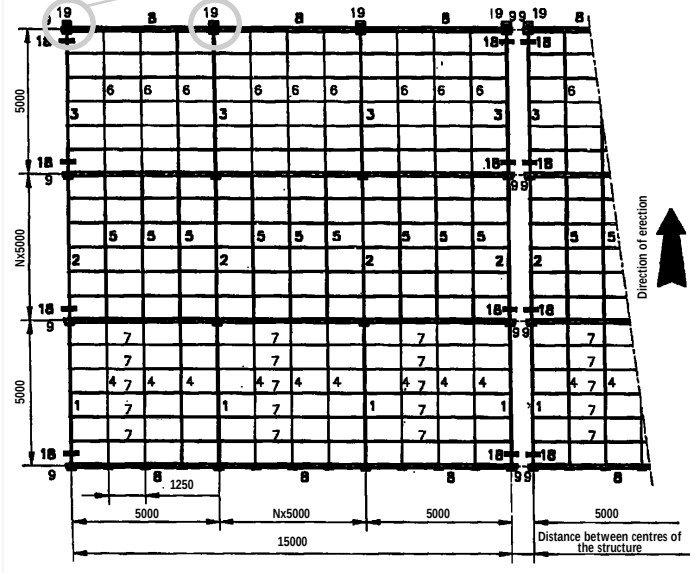

Direction of erection

Specifications

	Diagram ref	Dimensions
Start outer beam	1	80/40
Intermediate outer beam	2	80/40
End outer beam	3	80/40
Start inner beam	4	80/40
Intermediate inner beam	5	80/40
End inner beam	6	80/40
Steel cross beam	7	50/50
Aluminium cross beam	8	150/72
Gable bay	L1	5 m
Span	L2	
Lateral bay	L3	5 m
Resistance		500 kg/m² spreaded
Required wedging		1.25 m squares

Erection / Dismantling

	20x50 m
Number of people	8
Total duration of erection	8 hours with average wedging
Time saved for dismantling	20 to 25%

Anchoring and weighting

Refer to the indicated values of the relevant structure

Packaging

	Frame	Wooden boards	1 board 0.5x5 m
Weight without packaging	10 kg/m²	11 kg/m²	27 kg
Full load lorry transport	800 m²		
Description of packaging	Wooden boards on rack Frame in bundles, loose or on rack Accessories in pallets or boxes		