

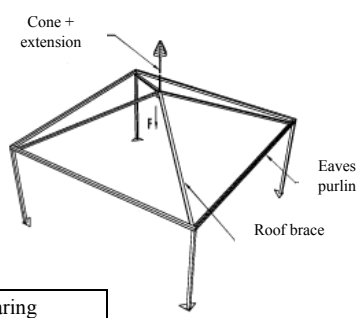
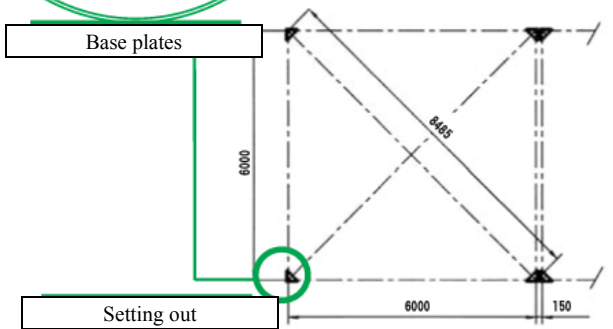
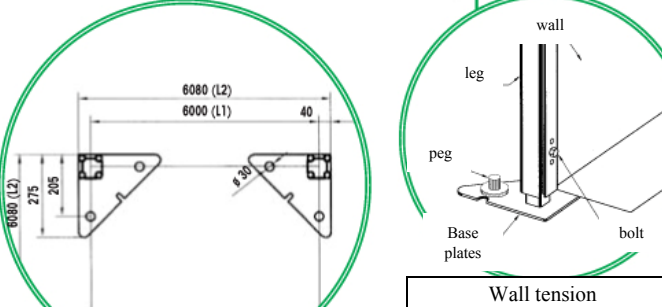


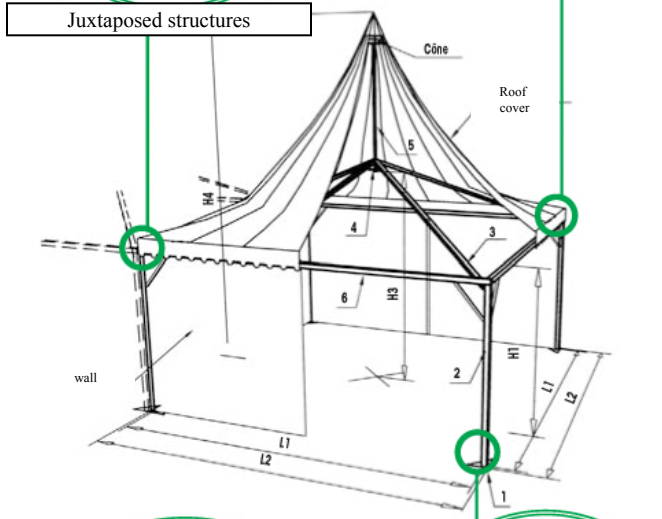

**Garden Cottage,
6x6 m
Ht 2,50 and 3 m**

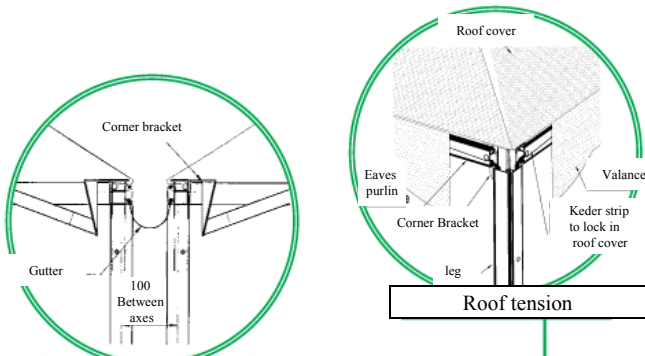

Specifications		6x6 m	
		ht 2,50m	ht 3m
Span	L2	6,08	6,08
Distance between leg centres	L1	6	6
External ridge height	H4	5,7	6,2
Internal ridge height	H3	4,3	4,8
Eaves height	H1	2,44	2,94
Long side bay	L1	6	6
Base Plate	1	274x274	274x274
Leg	2	80x80	80x80
Roof Brace	3	50x50	50x50
Central junction	4		
Cone + extension	5		
Eaves purlin	6	80x80	80x80
Lateral Brace		30x30	30x30

Erection/dismantling	6x6 m	
	ht 2,50 m	ht 3 m
Number of people	3	3
Total duration of erection	1,30 hours	1,30 hours
vehicles + duration	Fork lift truck	
Necessary equipment not provided	2 no. 4m ladders, 1 no. 20m measuring tape, sledgehammer, hammer, adjustable spanner	
Time saved for dismantling	30%	

* exemples details and explanations page 112

Anchoring and weighting	Anchoring			Weighting	
	Uplift force kg	Coef.	Number of pegs	Uplift force kg	Coef.
Structure 6x6 m	500	2	2 lg 500	410	1,65

* exemples details and explanations page 112

Load Bearing	height 2,50 m and 3 m
With snow	F = 0 kg
Without snow	F = 50 kg

* exemples details and explanations page 112

Packaging	Frame	Covers	Example
	6x6 m	6x6 m	6x6x2,5
Weight w without packaging ht 2,50 m (kg)	212	100	312
Weight w without packaging ht 3 m (kg)	219	108	
Number of pallets - covers 2,10x1,20x1 m			1
Number of frame bundles 6x1,20x0,80 m			1
Number of boxes 1,10x1,10x1 m			1
Longest piece : Eaves purlin 6000 mm			
Description of packaging, Covers in bags on pallet, Frame in bundles accessories in boxes			

* Calculated on basis of complete structures, not mixed